

TV5CH Contemporary side single lever tap

CDA

5 Year warranty:

All CDA taps are covered by a 5 year parts guarantee. Labour & fitting costs are not included except under exceptional circumstances. Decorative surface finishes and O-rings are guaranteed for ONE year from the date of purchase provided that our advice concerning care has been observed. This is provided that the mixer has been used for normal domestic purposes in the UK and that the care, installation and maintenance instructions have been observed. The warranty extends to the original purchaser only. You should retain a copy of your dated invoice as proof of purchase to validate any claims under this guarantee.

Care Instructions for your Tap:

To maintain the appearance of this tap, ensure that it is regularly cleaned only using a clean, soft damp cloth. A solution of warm water and a mild liquid detergent may be used where necessary, and then the fitting rinsed thoroughly and wiped dry. Any other cleaning action will invalidate your warranty.

If the tap has a diffuser it should be cleaned periodically. Abrasive cleaners, scouring cleaners and acidic cleaners must not be used under any circumstances. Avoid contact with all solvents (including chlorinated solvents, ketones or acetones as these may result in surface deterioration or etching). Also avoid contact with any harsh household chemicals such as oven cleaners, drain cleaners, rust removers, paint strippers and toilet bowl cleaners, bar keepers friend or Brasso.

Important Technical Data:

| | | | |
|----------------------------|---------|-------------------------------|--------|
| Minimum operating pressure | 0.5 bar | Maximum hot water temperature | 90 °C* |
| Maximum operating pressure | 12 bar* | | |

*If these temperatures or pressures are exceeded, even for short periods, damage can result.

CDA taps are either WRAS approved or manufactured in accordance with recognised European standards. Please ensure that your tap is fitted in accordance with Local Water Byelaws.

These installation guidelines have been prepared for your direction and you must exercise due care at all times. We do not accept responsibility for problems that may occur through improper installation. Whilst assembling the tap take care not to accidentally loosen any screwed assemblies.



TV5CH Contemporary side single lever tap

CDA

Installation Preparation:

Before installing a new tap it is essential that you thoroughly flush through the supply pipes in order to remove any remaining solder, swarf or impurities from your system. Failure to carry out this simple procedure could cause problems or damage to the internal components of the tap.


We strongly recommend installing particle filter strainers and isolation valves to both the hot and cold feed pipes in an accessible position. This will help to prevent premature failure of the valves and ease any future maintenance.

All parts should be removed from their packaging and inspected for any transport damage prior to installation.

Turn off and drain the water supply to the sink, unless there are isolation valves fitted.

This tap requires a 35mm^ø tap hole. If replacing an existing tap, remove the tap and clean the end of the feed pipes using wire wool the tap hole area should be free from dirt and sealant. Loosely position the tap and tail pipes to check if any alteration to the existing pipework is required, if this is the case do this now.

Installation:

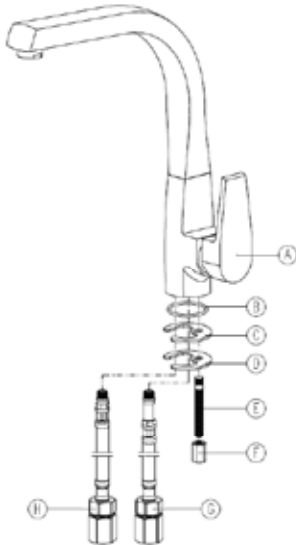

| KEY | DESCRIPTION | QUANTITY |
|-----|-------------------------|----------|
| A | Tap body | 1 |
| B | Upper sink/worktop seal | 1 |
| C | Horseshoe washer | 1 |
| D | Horseshoe washer | 1 |
| E | Studded rod | 1 |
| F | Fixing nut | 1 |
| G | Inlet pipe (offset) | 1 |
| H | Inlet pipe | 1 |

After installation:

Once you have visually checked the new fittings and connections, turn the water supply back on and check all fittings carefully for leaks. Then turn the tap back on and check there are no leaks from the body or valve area.

Clean the tap to remove any marks created during installation as instructed then replace the bag that has been provided to protect the tap until it is ready for use.

